


RENOLIT ALKORPLAN F Terrace

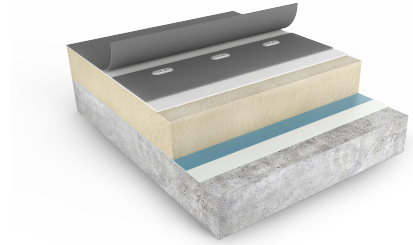

Product information

RENOLIT ALKORPLAN F Terrace
Synthetic roofing membrane of flexible PVC, reinforced with a polyester scrim.

Application

RENOLIT ALKORPLAN F - Terrace is used as waterproofing membrane within a mechanically fastened system for terrace roofs of plywood or concrete

Certificates

Product certification EN 13956
0749-CPR / BC2-320-01452-0001-01

Certificates available on our website
www.renolit.com/roofing.

PRODUCT DATA

	Method	Production values RENOLIT ALKORPLAN F 2,0 mm	Units
Tensile strength	EN 12311-2 (A)	≥ 1150	N/50 mm
Elongation	EN 12311-2 (A)	≥ 16	%
Dimensional stability (6h at 80 °C)	EN 1107-2	≤ 0.3	%
Cold crack temperature	EN 495-5	≤ -30	°C
Nail tear resistance	EN 12310-1	≥ 400	N
Tear resistance	EN 12310-2	≥ 275	N
Joint peel resistance	EN 12316-2	≥ BOJ or 275	N/50 mm
Water vapour diffusion resistance (μ)	EN 1931	20.000	-
Resistance to static perforation	EN 12730	≥ 20	kg
External fire	EN 13501-5	B _{roof} (t2)*	

* See modalities

PACKAGING

	Thickness	Width	Weight	Roll length	Roll weight
RENOLIT ALKORPLAN F 00197	2.0 mm	2.10 m	2.50 kg/m ²	15 lm	ca. 80 kg

Storage

The rolls should be stored horizontally and parallel to each other. Store in the original packaging, in a dry and frost-free area, protected from direct sunlight. The maximum stack height is 2 high with a protection between the pallets.

The RENOLIT ALKORPLAN roofing membranes are supplied in rolls on cardboard cores. Every delivery may contain up to 10% of short rolls (minimum length: 8 m).

This document replaces and supersedes all previous versions.

WWW.RENOLIT.COM/ROOFING

RENOLIT Nordic A/S - Naverland 31 - 2600 Glostrup - Danmark
T +45 43 64 46 33 - renolit.nordic@renolit.com



Rely on it.

R2275ESC1021