



DATA SHEET

ALKORMETAL LAMINATE - Type 81170 022/032/042/002

Application:

For fixing RENOLIT ALKORPLAN reinforced membranes to pool walls.

Description:

An alloy of steel and zinc sheet 0.63 mm thick laminated to 0.8mm RENOLIT ALKORPLAN PVC-P. The steel sheet has a protective lacquer.

Use:

Consult the chapter referring to the different fixing methods in the RENOLIT ALKORPLAN membrane Installation Manual.


Properties:

Constant, permanent bond between the ALKORMETAL laminate and RENOLIT ALKORPLAN membranes.

Storage:

Store in a dry place in the original packaging.

Feature	81170 022	81170 032	81170 042	81170 002
Description	Alkormetal PVC/Steel laminate	Countersunk Alkormetal laminate	Alkormetal Laminate 90° angle profile	Alkormetal Laminate
Thickness	1.4 mm	1.4 mm	1.4 mm	1.4 mm
Width	5 cm	3.6 cm	4.5 x 4.5 cm	1 m
Length	2 m	2 m	2 m	2 m
Weight (approx.)	5.4 kg·m ²	5.4 kg·m ²	5.4 kg·m ²	5.4 kg·m ²
Colour	Adriatic blue	Adriatic blue	Adriatic blue	Adriatic blue
Packaging	Unit	Unit	Unit	Unit

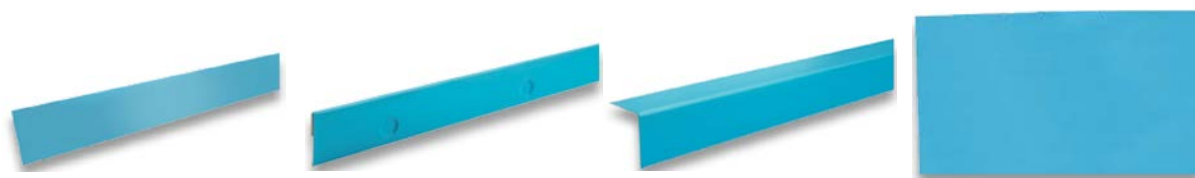

April 7, 2017